

INSTALLATION WITH MULTIPLE DEVICES


This guide shows you how to set up your Broadband Voice Adapter with a Router or Switch instead of just a single PC. This way you can share your internet connection with multiple computers (i.e. via Wireless Lan).


1. SET UP THE NETWORK CONNECTIONS


- Unplug the power cable for your modem.
- Unplug the power cable for your router.
- Disconnect the Ethernet cable connecting your modem to your router from the WAN/Internet port on your router, and connect that end of the Ethernet cable to the Internet port on the TA612V Voice Adapter.
- Connect one end of the Ethernet cable we provide into the PC port on the TA612V. Connect the other end of this Ethernet cable into the WAN/Internet port on your router.
- Plug the power cable back into your modem. **Wait about two minutes for it to start up.**

2. THEN, INSTALL THE TA612V VOICE ADAPTER

- Plug the power cable into the Power port on the TA612V Voice Adapter and into an electrical outlet. This turns on your Voice Adapter. You do not need to unplug it when not in use.

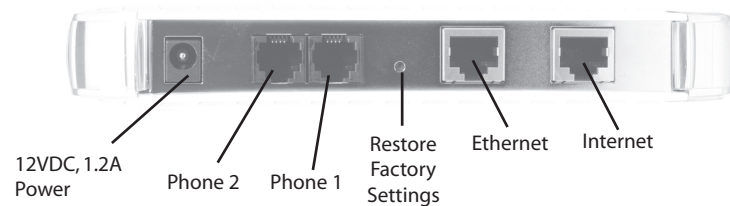

- Check that the Power light  on the Voice Adapter is illuminated. **Wait at least five minutes for the phone adapter to start up.** There may be updates that need to be downloaded such as new firmware or changes to your features. **Do not interrupt the registration process by unplugging the power or lifting the receiver on your phone during the start-up process. Interruption of the startup may result in interruption of service.**
- The status light on the front of the TA612V will flash. **Wait two minutes before continuing.**

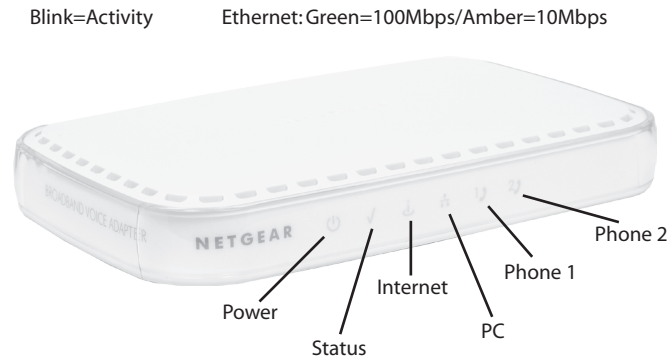


- Plug the power cable back into your router and wait about two minutes for it to start up before continuing.
- Connect a telephone to the TA612V Phone 1 port using the adapter provided.
- If you have a broadband connection that requires PPPoE you need to set up your PPPoE username and password in the TA612V. Point your browser to: **<http://192.168.61.1/>** Log in using the username and password printed on the back of the TA612V. After setup reboot your TA612V.

3. SET UP AN ACCOUNT AT ENGIN

- Power up the computer.
- Use a Web browser to go to the Engin Website, www.engin.com.au/public/signup.htm Follow the instructions to register your account. Once you have registered your Netgear Voice Adaptor you will be sent an activation email when your details have been processed.

TROUBLESHOOTING

If you have no dial tone, check the following:

- Make sure the phone is plugged into the proper port on the Voice Adapter (phone port #1)
- Make sure the Internet light  on the Voice Adapter is active. If not, check your connection to the Internet. Try rebooting your modem. If that does not work, contact your Internet provider's customer service.
- This Voice Adapter is not supposed to be used behind a Router. Please connect it directly to the modem.